
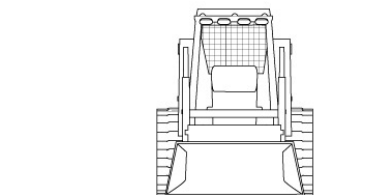


RITCHIE Specs Everything about Equipment

CASE TV380 MULTI TERRAIN LOADER

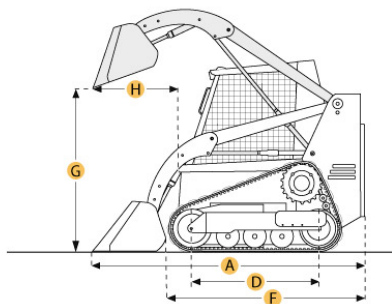


Dimensions

A. LENGTH W/ BUCKET	11.8 ft in	3600 mm
B. WIDTH OVER TRACKS	6.2 ft in	1900 mm
C. HEIGHT TO TOP OF CAB	6.6 ft in	2000 mm
E. GROUND CLEARANCE	9.6 in	243 mm
F. LENGTH W/O BUCKET	9.5 ft in	2900 mm
G. CLEARANCE AT MAX LIFT AND DUMP	9.2 ft in	2800 mm
H. REACH AT MAX LIFT AND DUMP	2.6 ft in	790 mm

Undercarriage

D. LENGTH OF TRACK ON GROUND	5.2 ft in	1600 mm
I. TRACK GAUGE	4.9 ft in	1500 mm



RITCHIE Specs Everything about Equipment

CASE TV380 MULTI TERRAIN LOADER

Specification

Engine		
MAKE	Case	
MODEL	432T/M3	
GROSS POWER	90 hp	67.1 kw
NET POWER	84 hp	62.6 kw
POWER MEASURED @	2500 rpm	
PEAK TORQUE	251 lb ft	340.3 Nm
TORQUE MEASURED @	1400 rpm	
NUMBER OF CYLINDERS	4	
DISPLACEMENT	195 cu in	3.2 L
ASPIRATION	Turbocharged	
Operational		
OPERATING WEIGHT	10200 lb	4626.6 kg
FUEL CAPACITY	25.5 gal	96.5 L
ENGINE OIL CAPACITY	2.5 gal	9.5 L
HYDRAULIC SYSTEM FLUID CAPACITY	11.8 gal	44.5 L
OPERATING VOLTAGE	12 V	
ALTERNATOR SUPPLIED AMPERAGE	95 amps	
MAX SPEED - LOW RANGE	5.8 mph	9.3 km/h
MAX SPEED - HIGH RANGE	8.3 mph	13.4 km/h
Undercarriage		
GROUND CONTACT AREA	2038 in ²	1.3 m ²
GROUND PRESSURE	5 psi	34.5 kPa
LENGTH OF TRACK ON GROUND	5.2 ft in	1600 mm
WIDTH OF TRACK	15.7 in	400 mm
TRACK GAUGE	4.9 ft in	1500 mm
Loader		
OPERATING LOAD	3800 lb	1723.7 kg
TIPPING LOAD	7600 lb	3447.3 kg
BUCKET CAPACITY	0.68 yd ³	0.52 m ³
BUCKET WIDTH	78 in	1981.2 mm
Hydraulic		
PUMP TYPE	Gear	
PUMP FLOW	22.5 gal/min	85.2 L/min
Dimensions		
WIDTH OVER TRACKS	6.2 ft in	1900 mm
LENGTH W/ BUCKET	11.8 ft in	3600 mm
LENGTH W/O BUCKET	9.5 ft in	2900 mm
HEIGHT TO TOP OF CAB	6.6 ft in	2000 mm
GROUND CLEARANCE	9.6 in	243 mm
CLEARANCE AT MAX LIFT AND DUMP	9.2 ft in	2800 mm
REACH AT MAX LIFT AND DUMP	2.6 ft in	790 mm
TURNING RADIUS FROM CENTER - MACHINE REAR	70.9 in	1800 mm
TURNING RADIUS FROM CENTER - INC BUCKET	85 in	2159 mm